


FEATURES

- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current
- Low Inductance Package

APPLICATIONS

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter

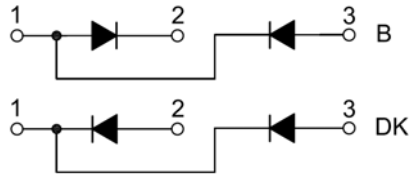

MODULE TYPE

TYPE	Circuit Diagram		VRRM (Repetitive Peak Reverse Voltage)	VRSM (Non-Repetitive Peak Reverse Voltage)	Unit
	B	DK			
MMD130S120B	MMD130S120DK	1200	1300	V	
MMD130S140B	MMD130S140DK	1400	1500		
MMD130S160B	MMD130S160DK	1600	1700		
MMD130S180B	MMD130S180DK	1800	1900		

ABSOLUTE MAXIMUM RATINGS

T_c=25°C unless otherwise specified

Symbol	Parameter	Test Conditions	Values	Unit
I _{F(AV)}	Average Forward Current	Single phase, half wave, 180°conduction, T _c = 95°C	130	A
I _{F(RMS)}	R.M.S. Forward Current		204	
I _{FSM}	Non-Repetitive Surge Forward Current	1/2 cycle, 50HZ, peak value T _c =45°C	3500	
		1/2 cycle, 60HZ, peak value T _c =45°C	3800	
I ² t	I ² t (For Fusing)	1/2 cycle, 50HZ, peak value T _c =45°C	61.2	KA ² s
		1/2 cycle, 60HZ, peak value T _c =45°C	60.0	KA ² s
P _D	Power Dissipation		625	W
T _J	Junction Temperature		-40 to +150	°C
T _{STG}	Storage Temperature Range		-40 to +125	°C
V _{ISO}	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	Module-to-Sink	Recommended (M6)	3~5	N.m
Torque	Module Electrodes	Recommended (M6)	3~5	N.m
R _{th (J-C)}	Junction-to-Case Thermal Resistance		0.2	K /W
Weight			170	g

MMD130S

ELECTRICAL AND THERMAL CHARACTERISTICS $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Max.Reverse Leakage Current	$V_R = V_{RRM}$			500	μA
		$V_R = V_{RRM}, T_J = 125^\circ\text{C}$			10	mA
V_F	Forward Voltage	$I_F = 400\text{A}$			1.5	V
V_{T0}	For power-loss calculations only				0.85	V
r_T	$T_J = 125^\circ\text{C}$				1.6	$\text{m}\Omega$

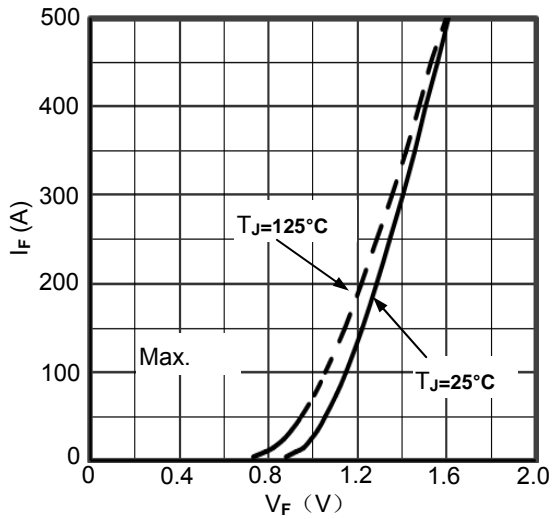


Figure1. Forward current vs.voltage drop

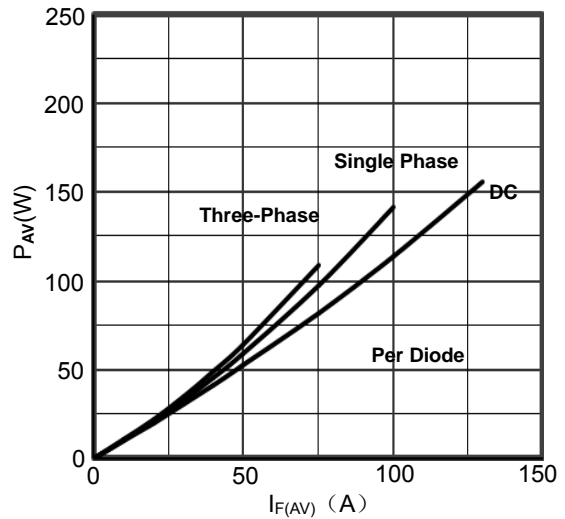


Figure2. Diode Power dissipation vs. $I_{F(AV)}$

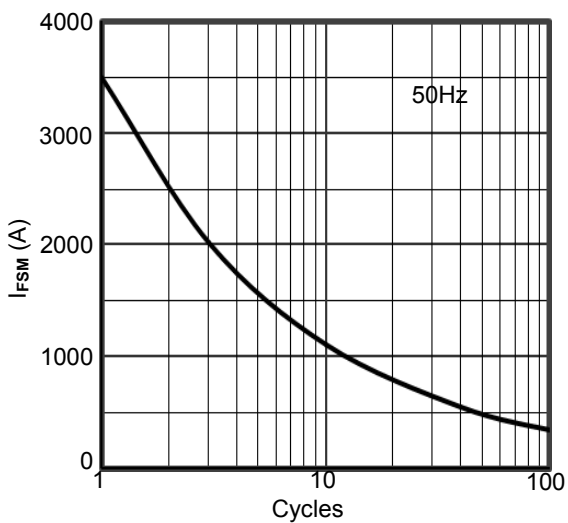


Figure3. Max Non-Repetitive Forward Surge Current

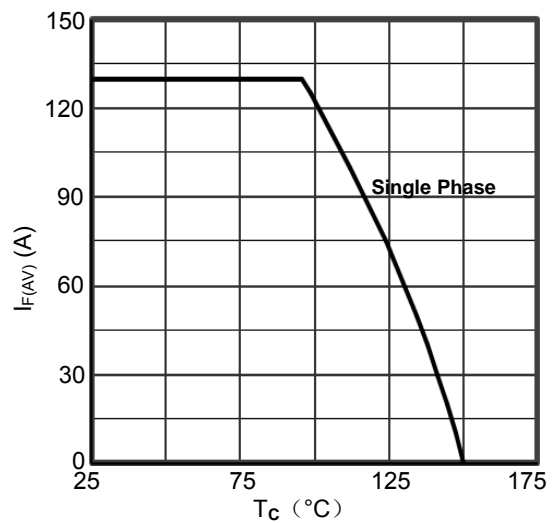


Figure4. Forward current vs. Case temperature


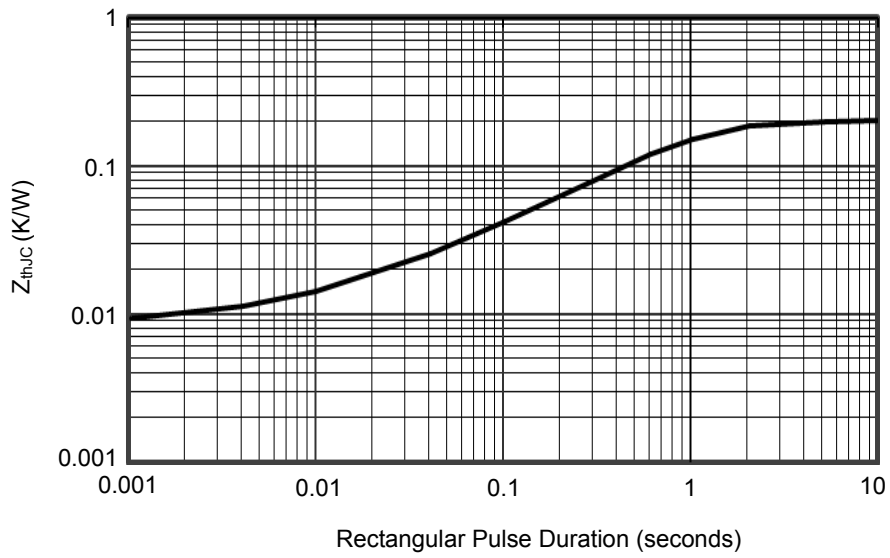


Figure5. Transient Thermal Impedance

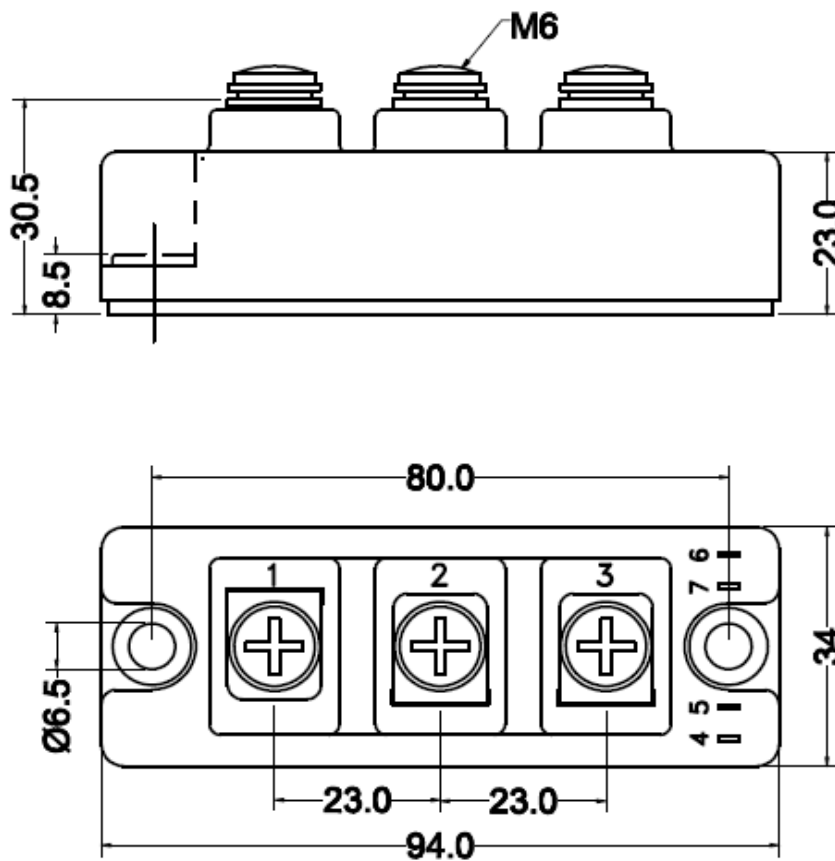

Dimensions in Millimeters
Figure6. Package Outline