


## PRODUCT FEATURES

- IGBT<sup>3</sup> CHIP(Trench+Field Stop technology)
- High short circuit capability,self limiting short circuit current
- $V_{CE(sat)}$  with positive temperature coefficient
- Fast switching and short tail current
- Free wheeling diodes with fast and soft reverse recovery
- Low switching losses
- 10K  $\Omega$  Gate Protected Resistance Inside



## APPLICATIONS

- High Power Converters
- Medical applications
- Motion/servo control
- UPS systems/Wind Turbines



## IGBT-Inverter

### ABSOLUTE MAXIMUM RATINGS

$T_C=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
$V_{CES}$	Collector Emitter Voltage	$T_J=25^\circ\text{C}$	600	V
$V_{GES}$	Gate Emitter Voltage		$\pm 20$	
$I_C$	DC Collector Current	$T_C=25^\circ\text{C}$	720	A
		$T_C=60^\circ\text{C}$	600	
$I_{CM}$	Repetitive Peak Collector Current	$t_p=1\text{ms}$	1200	
$P_{tot}$	Power Dissipation Per IGBT		1650	W

## Reverse-Diode

### ABSOLUTE MAXIMUM RATINGS

$T_C=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
$V_{RRM}$	Repetitive Reverse Voltage	$T_J=25^\circ\text{C}$	600	V
$I_{F(AV)}$	Average Forward Current	$T_C=25^\circ\text{C}$	600	A
$I_{FRM}$	Repetitive Peak Forward Current	$t_p=1\text{ms}$	1200	
$i^2t$		$T_J=125^\circ\text{C}$ , $t=10\text{ms}$ , $V_R=0\text{V}$	31250	$\text{A}^2\text{S}$

**IGBT-Inverter**  
**ELECTRICAL CHARACTERISTICS**
 $T_C=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit	
$V_{GE(th)}$	Gate Emitter Threshold Voltage	$V_{CE}=V_{GE}, I_C=9.6\text{mA}$	4.9	5.8	6.5	V	
$V_{CE(sat)}$	Collector Emitter Saturation Voltage	$I_C=600\text{A}, V_{GE}=15\text{V}, T_J=25^\circ\text{C}$		1.45	1.9		
		$I_C=600\text{A}, V_{GE}=15\text{V}, T_J=125^\circ\text{C}$		1.6			
$I_{CES}$	Collector Leakage Current	$V_{CE}=600\text{V}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$			1	mA	
		$V_{CE}=600\text{V}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$			10	mA	
$I_{GES}$	Gate Leakage Current	$V_{CE}=0\text{V}, V_{GE}=\pm 15\text{V}, T_J=25^\circ\text{C}$	-400		400	nA	
$R_{gint}$	Integrated Gate Resistor			0.5		$\Omega$	
$Q_g$	Gate Charge	$V_{CE}=300\text{V}, I_C=600\text{A}, V_{GE}=\pm 15\text{V}$		6.4		$\mu\text{C}$	
$C_{ies}$	Input Capacitance	$V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$		37.2		nF	
$C_{res}$	Reverse Transfer Capacitance				1.2		nF
$t_{d(on)}$	Turn on Delay Time	$V_{CC}=300\text{V}, I_C=600\text{A}$ $R_G=1.5\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$		260		ns
			$T_J=125^\circ\text{C}$		290		ns
$t_r$	Rise Time	Inductive Load	$T_J=25^\circ\text{C}$		70		ns
			$T_J=125^\circ\text{C}$		90		ns
$t_{d(off)}$	Turn off Delay Time	$V_{CC}=300\text{V}, I_C=600\text{A}$ $R_G=1.5\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$		450		ns
			$T_J=125^\circ\text{C}$		520		ns
$t_f$	Fall Time	Inductive Load	$T_J=25^\circ\text{C}$		90		ns
			$T_J=125^\circ\text{C}$		100		ns
$E_{on}$	Turn on Energy	$V_{CC}=300\text{V}, I_C=600\text{A}$ $R_G=1.5\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$		9.5		mJ
			$T_J=125^\circ\text{C}$		12.5		mJ
$E_{off}$	Turn off Energy	Inductive Load	$T_J=25^\circ\text{C}$		19		mJ
			$T_J=125^\circ\text{C}$		22.5		mJ
$I_{sc}$	Short Circuit Current	$tpsc \leq 6\mu\text{S}, V_{GE}=15\text{V}$ $T_J=125^\circ\text{C}, V_{CC}=360\text{V}$		3000		A	
$R_{thJC}$	Junction to Case Thermal Resistance ( Per IGBT )				0.09	K/W	

**Reverse-Diode**  
**ELECTRICAL CHARACTERISTICS**
 $T_C=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$V_F$	Forward Voltage	$I_F=600\text{A}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$		1.55	1.9	V
		$I_F=600\text{A}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$		1.5		
$I_{RRM}$	Max. Reverse Recovery Current	$I_F=600\text{A}, V_R=300\text{V}$		690		A
$Q_{RR}$	Reverse Recovery Charge	$dI_F/dt=-6800\text{A}/\mu\text{s}$		50		$\mu\text{C}$
$E_{rec}$	Reverse Recovery Energy	$T_J=125^\circ\text{C}$		13		mJ
$R_{thJCD}$	Junction to Case Thermal Resistance ( Per Diode )				0.15	K/W

**MODULE CHARACTERISTICS**

$T_C=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
$T_{Jmax}$	Max. Junction Temperature		175	°C
$T_{Jop}$	Operating Temperature		-40~150	
$T_{stg}$	Storage Temperature		-40~125	
$V_{isol}$	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
<b>Torque</b>	to heatsink	Recommended (M6)	3~5	Nm
	to terminal	Recommended (M6)	2.5~5	Nm
	to terminal	Recommended (M4)	0.7~1.1	Nm
<b>Weight</b>			330	g

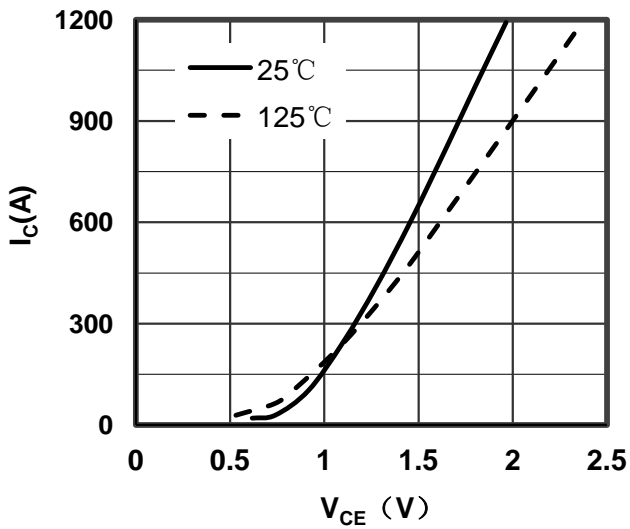


Figure 1. Typical Output Characteristics IGBT-Inverter

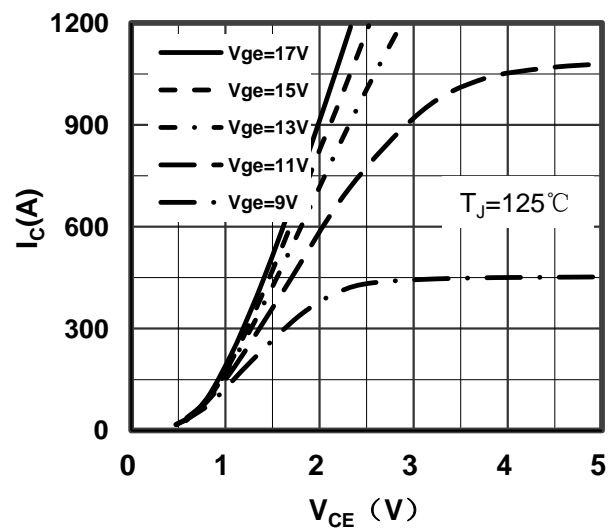


Figure 2. Typical Output Characteristics IGBT-Inverter

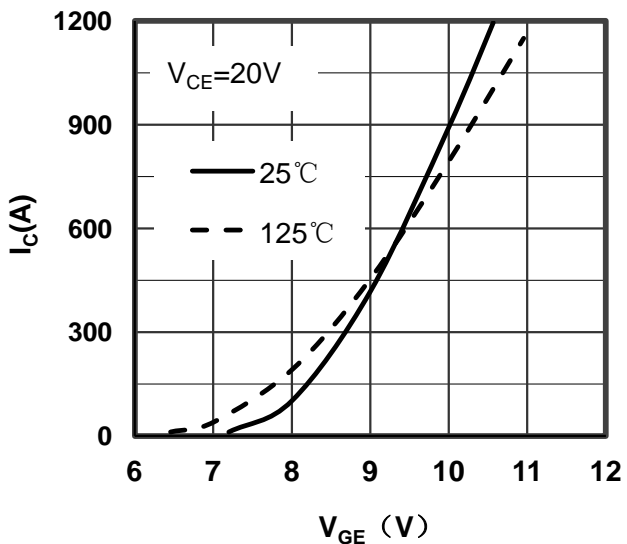


Figure 3. Typical Transfer Characteristics IGBT-Inverter

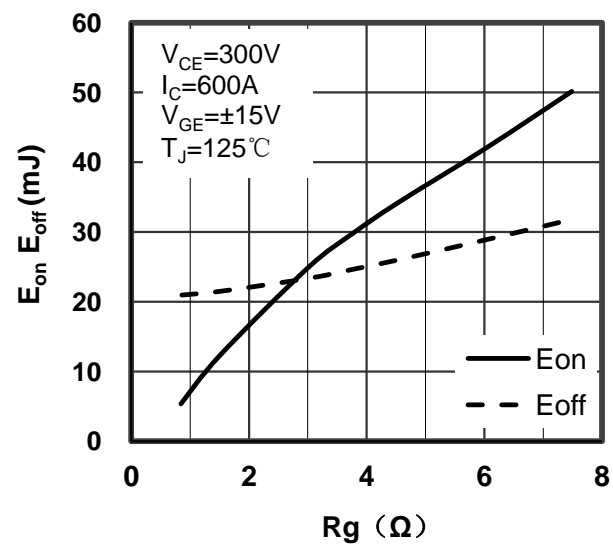


Figure 4. Switching Energy vs Gate Resistor IGBT-Inverter

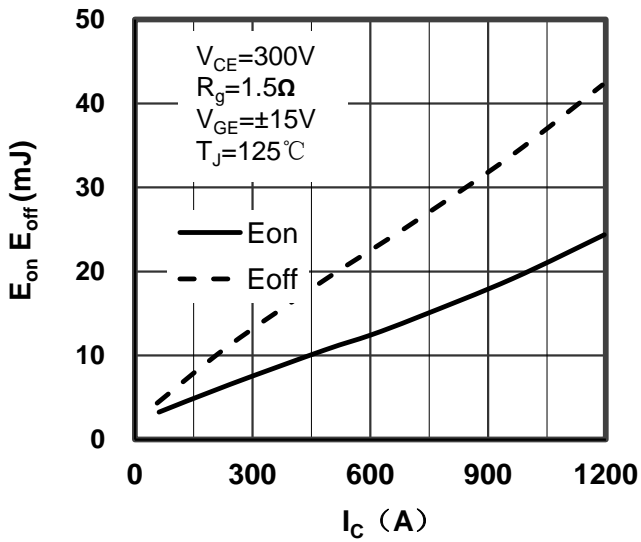


Figure 5. Switching Energy vs Collector Current IGBT-Inverter

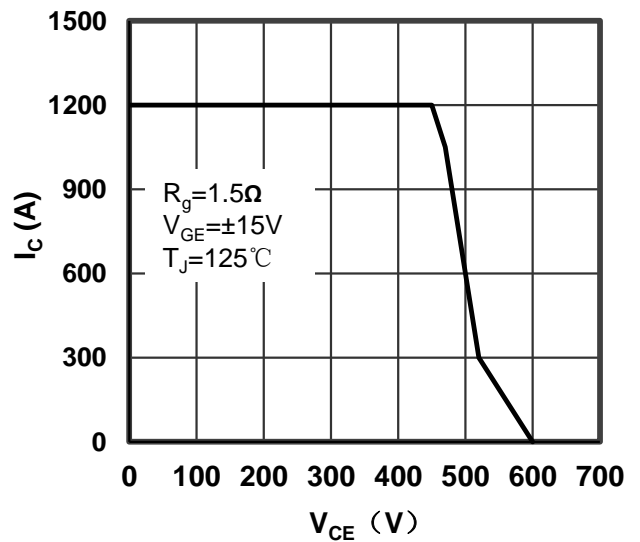


Figure 6. Reverse Biased Safe Operating Area IGBT-Inverter

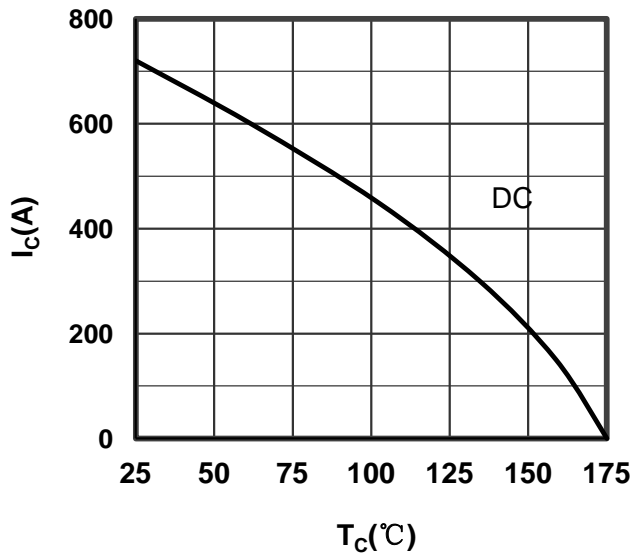


Figure 7. Collector Current vs Case temperature IGBT-Inverter

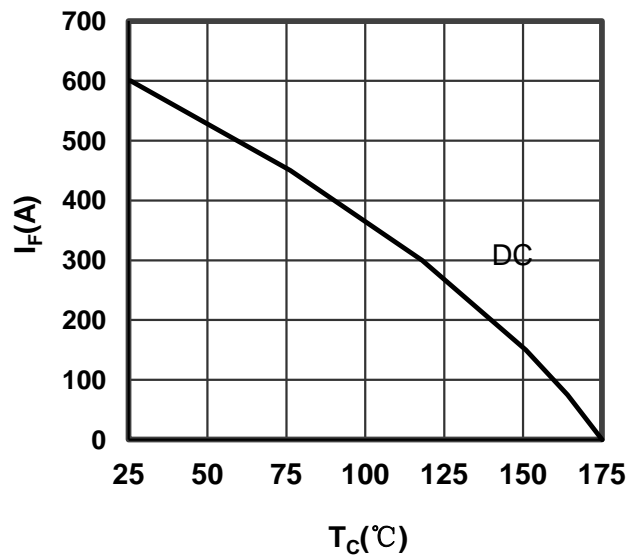


Figure 8. Forward current vs Case temperature Reverse-Diode

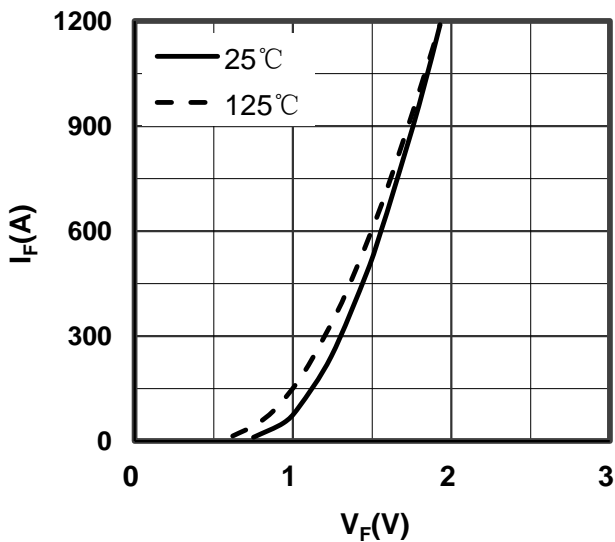


Figure 9. Diode Forward Characteristics Reverse-Diode

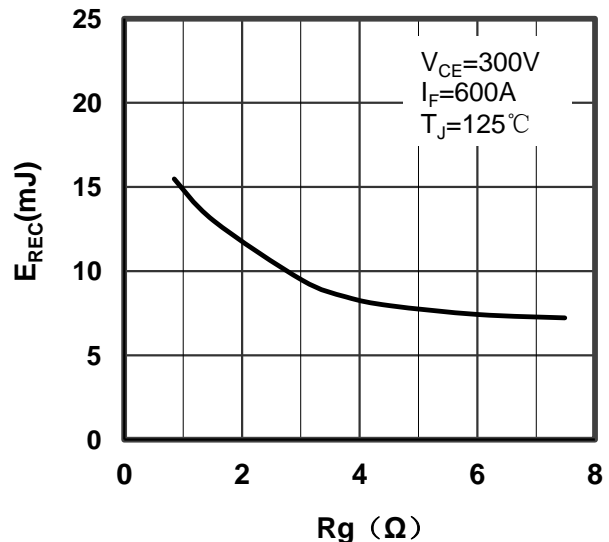


Figure 10. Switching Energy vs Gate Resistor Reverse-Diode

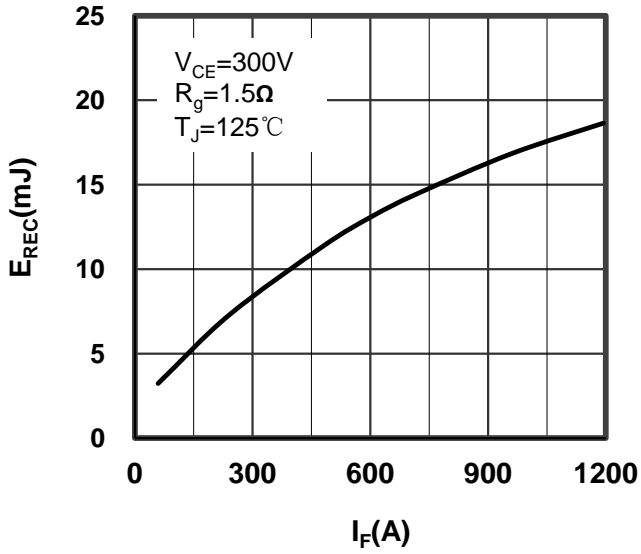


Figure 11. Switching Energy vs Forward Current Reverse-Diode


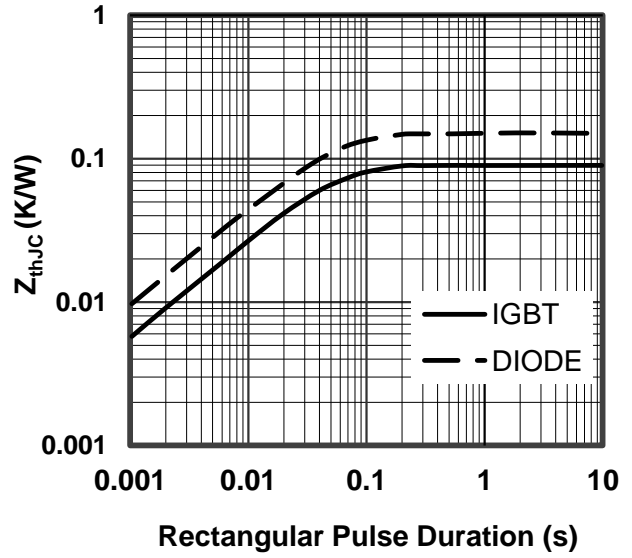


Figure 12. Transient Thermal Impedance of IGBT-Inverter and Reverse-Diode

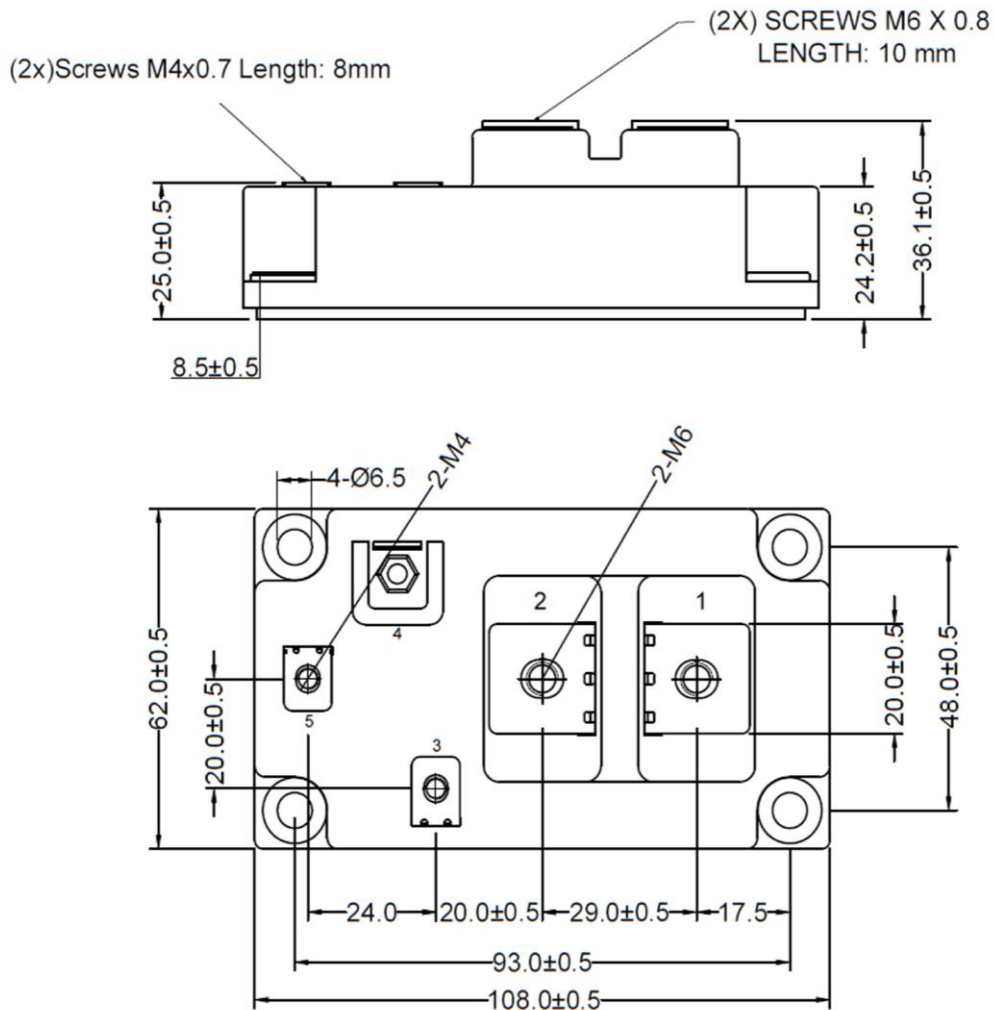

Dimensions in (mm)  
Figure 13. Package Outline