


## PRODUCT FEATURES

- Ultrafast Reverse Recovery Time
- Soft Reverse Recovery Characteristics
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current



## APPLICATIONS

- Inversion Welder
- Uninterruptible Power Supply
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- PFC

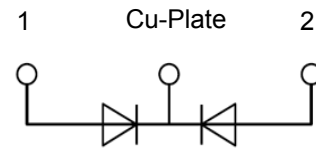

## ABSOLUTE MAXIMUM RATINGS ( $T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
$V_R$	Maximum D.C. Reverse Voltage		400	V
$V_{RRM}$	Maximum Repetitive Reverse Voltage			
$I_{F(AV)}$	Average Forward Current	$T_C=100^\circ\text{C}$ , Per Diode	100	A
		$T_C=100^\circ\text{C}$ , Per Moudle	200	
$I_{F(RMS)}$	RMS Forward Current	$T_C=100^\circ\text{C}$ , Per Diode	150	
$I_{FSM}$	Non Repetitive Surge Forward Current	$T_J=45^\circ\text{C}$ , $t=10\text{ms}$ , Sine, peak value	1250	
		$T_J=45^\circ\text{C}$ , $t=8.3\text{ms}$ , Sine, peak value	1350	
$I^2t$	For Fusing	$T_J=45^\circ\text{C}$ , $t=10\text{ms}$ , Sine, peak value	7812	$\text{A}^2\text{S}$
		$T_J=45^\circ\text{C}$ , $t=8.3\text{ms}$ , Sine, peak value	7563	
$P_D$	Power Dissipation		625	W
$T_J$	Junction Temperature		-40 to +150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range		-40 to +125	$^\circ\text{C}$
Torque	Module to Sink	Recommended (M6)	3~4.7	Nm
Torque	Module Electrodes	Recommended (M6)	3~4.7	Nm
$R_{thJC}$	Junction to Case Thermal Resistance(Per Diode)		0.1	$^\circ\text{C}/\text{W}$
Weight			92	g

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China

Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: www.macmicst.com

# MMF200Y040DK1

## ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
$I_{RM}$	Maximum Reverse Leakage Current	$V_R=400\text{V}$		500	$\mu\text{A}$
		$V_R=400\text{V}, T_J=125^\circ\text{C}$		10	mA
$V_F$	Forward Voltage	$I_F=100\text{A}$	1		V
		$I_F=100\text{A}, T_J=125^\circ\text{C}$		0.9	
$t_{rr}$	Reverse Recovery Time ( $I_F=1\text{A}, di_F/dt=-200\text{A}/\mu\text{s}, V_R=30\text{V}$ )		38		ns
$t_{rr}$	Reverse Recovery Time		70		ns
$I_{RRM}$	Maximum Reverse Recovery Current		11		A
$t_{rr}$	Reverse Recovery Time		130		ns
$I_{RRM}$	Maximum Reverse Recovery Current		18		A

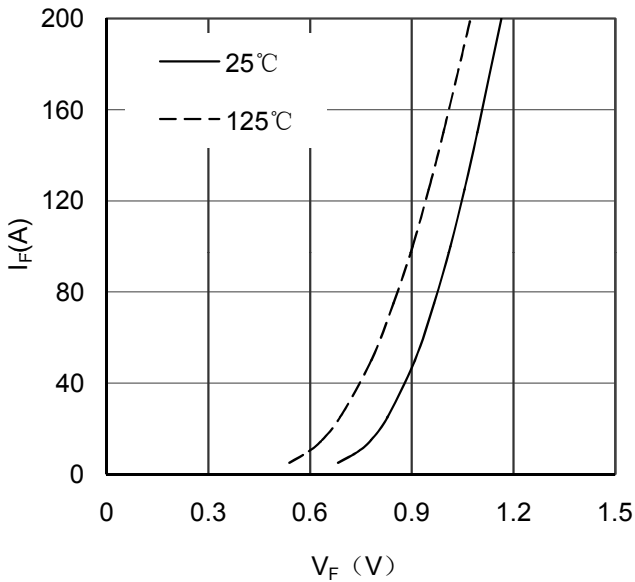


Figure 1. Forward Voltage Drop vs Forward Current

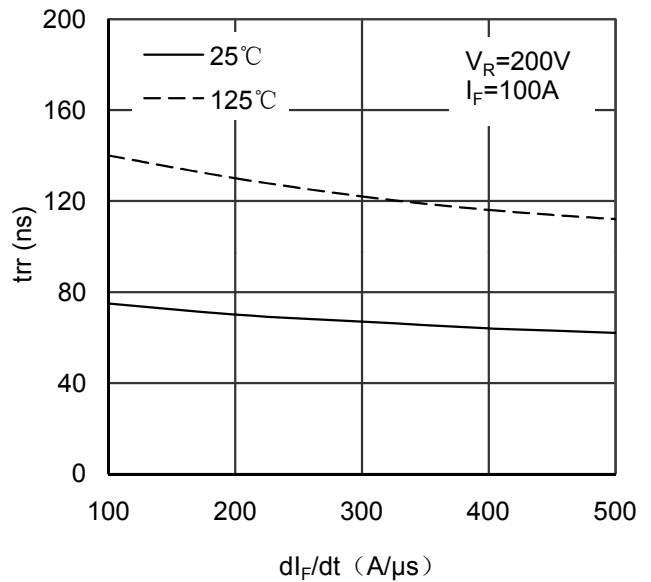


Figure 2. Reverse Recovery Time vs  $di_F/dt$

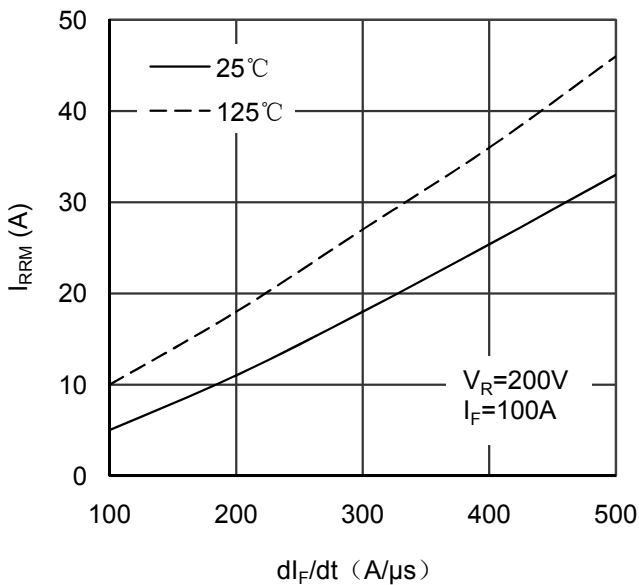


Figure 3. Reverse Recovery Current vs  $di_F/dt$

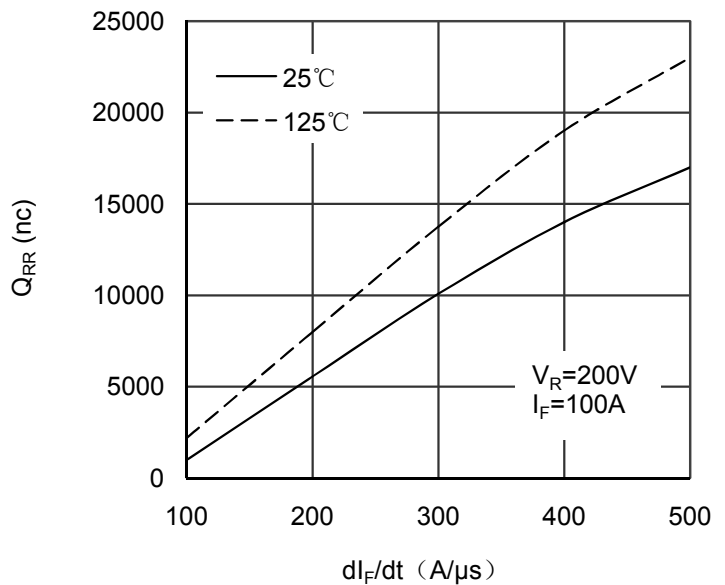


Figure 4. Reverse Recovery Charge vs  $di_F/dt$

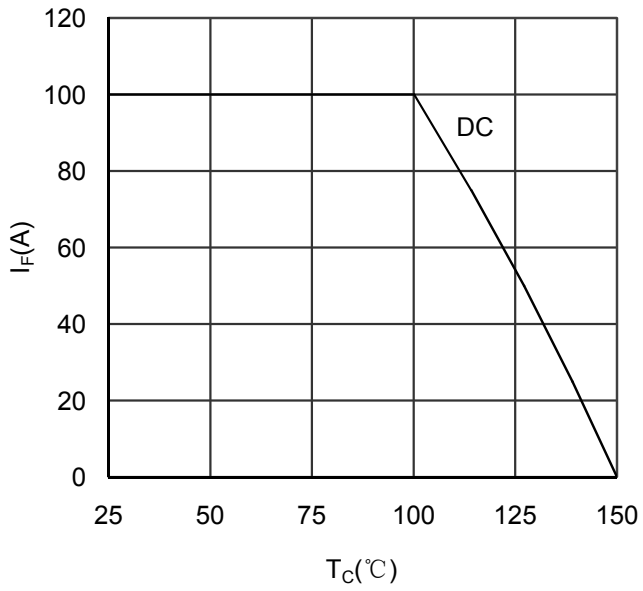


Figure 5. Forward current vs Case temperature


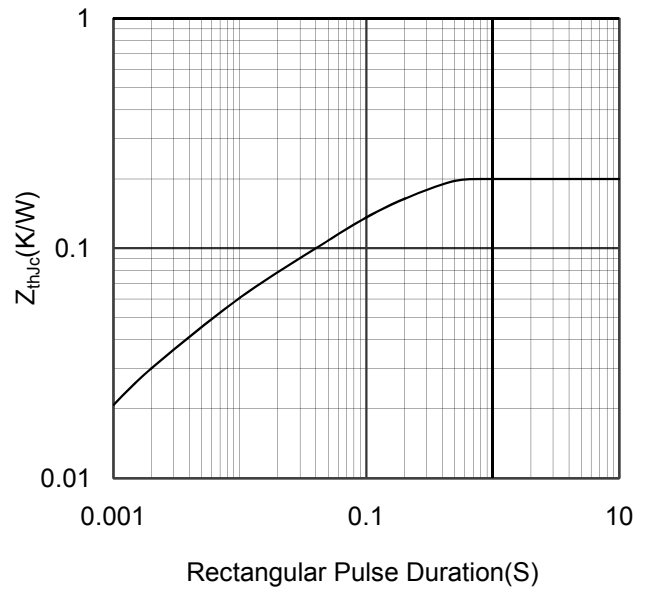


Figure 6. Transient Thermal Impedance

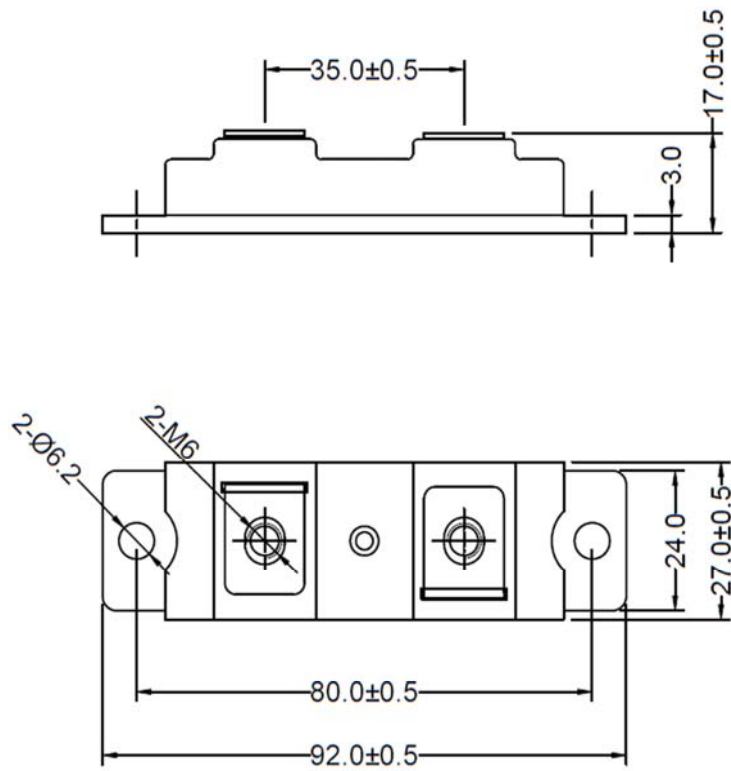

Dimensions in (mm)  
Figure 7. Package Outline